




Bare Soft Drawn Copper Conductor

According to BS6360/81

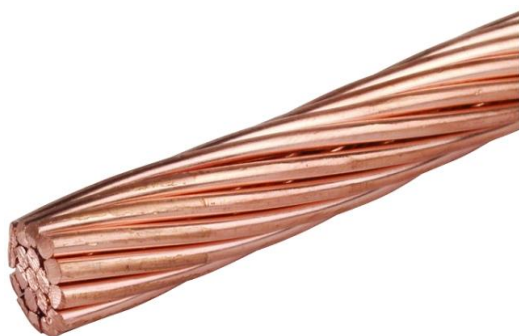

Benefits:

- Flexible.
- Supplied in any length.
- 40T in stock.
- Guaranteed same day and next day delivery available.

Nominal Cross Section (mm ²)	No. of wire	Cond Diameter (mm)	Weight Per Metre	Conductor Resistance at 20C
6	7/1.04	3.0	0.058	1.785
10	7/1.35	4.2	0.096	1.829
16	7/1.7	5.1	0.18	1.106
25	7/2.14	5.9	0.23	0.7563
35	7/2.52	7.8	0.311	0.5337
50	19/1.78	8.8	0.4435	0.3706
70	19/2.14	9.8	0.6211	0.2646
95	19/2.52	12.5	0.815	0.1980
120	37/2.03	12.8	1.03	0.1578
150	37/2.25	14.4	1.44	0.1208
185	37/2.52	16.1	1.625	0.09815
240	61/2.25	19.8	2.304	0.07878
300	61/2.25	20.6	2.76	0.0601
400	61/2.85	26.4	3.75	0.047

Earthmet Limited, Vulcan Industrial Estate, Leamore Lane, Walsall, West Midlands, WS2
7BZ

01922 714 290 or sales@earthmet.co.uk