
















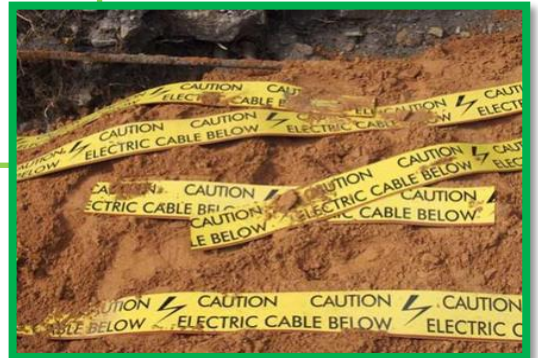



Underground Caution Tapes

Description

-  Premium and Economy grades available.
-  Premium is manufactured in accordance with ENATS 12-23 Issue 2:2013
-  High quality linear low density polyethylene with lead free pigments used
-  Soil PH tolerance is 2.5 to 11.0 inclusive.
-  Other film thickness can be supplied upon request.
-  Custom manufacturing, color and languages



Technical Data

-  **Material:** Low Density Polyethene (LLDPE)
-  **Origin:** United Kingdom
-  **Description:** Single Wound Sheet (SWS) treated for 1 side printing
-  **Size/Width:** 150mm X 100m/250m/365m/1000m
-  **Thickness:** Economy 0.5micron / Premium 0.1mm
-  **Slip Level:** Low
-  **Shrink:** N/A
-  **Base Colour:** Various
-  **Ink:** Highly Resistant, solvent based
-  **Core:** 76mm diameter cardboard core
-  **Reel Weight:** 5kg – 6kg
-  **Tolerance:** As per our current house standards +/- 10%

